


Recommendations

- Set up and operate only under the direction and supervision of qualified personnel.
- Operator should be experienced in the safe operation and handling of high pressure jacking systems.
- Ensure track is setup and remains level and parallel at all times.
- Track supports must be stable and capable of supporting the loads imposed.
- Load must be uniformly distributed over the surface of the skid shoe. Do not point load. Do not exceed capacity (see capacity chart).
- Use only a proper hydraulic pump unit, fluids and hoses. Do not exceed 10,000psi.
- Ensure push cylinders extend in unison otherwise the shoes may jam and result in possible damage.
- Maintain skidding surfaces clean, dry and completely covered with graphite. Reapply graphite frequently depending on use and storage conditions.
- Repair or replace any broken, worn or damaged components.

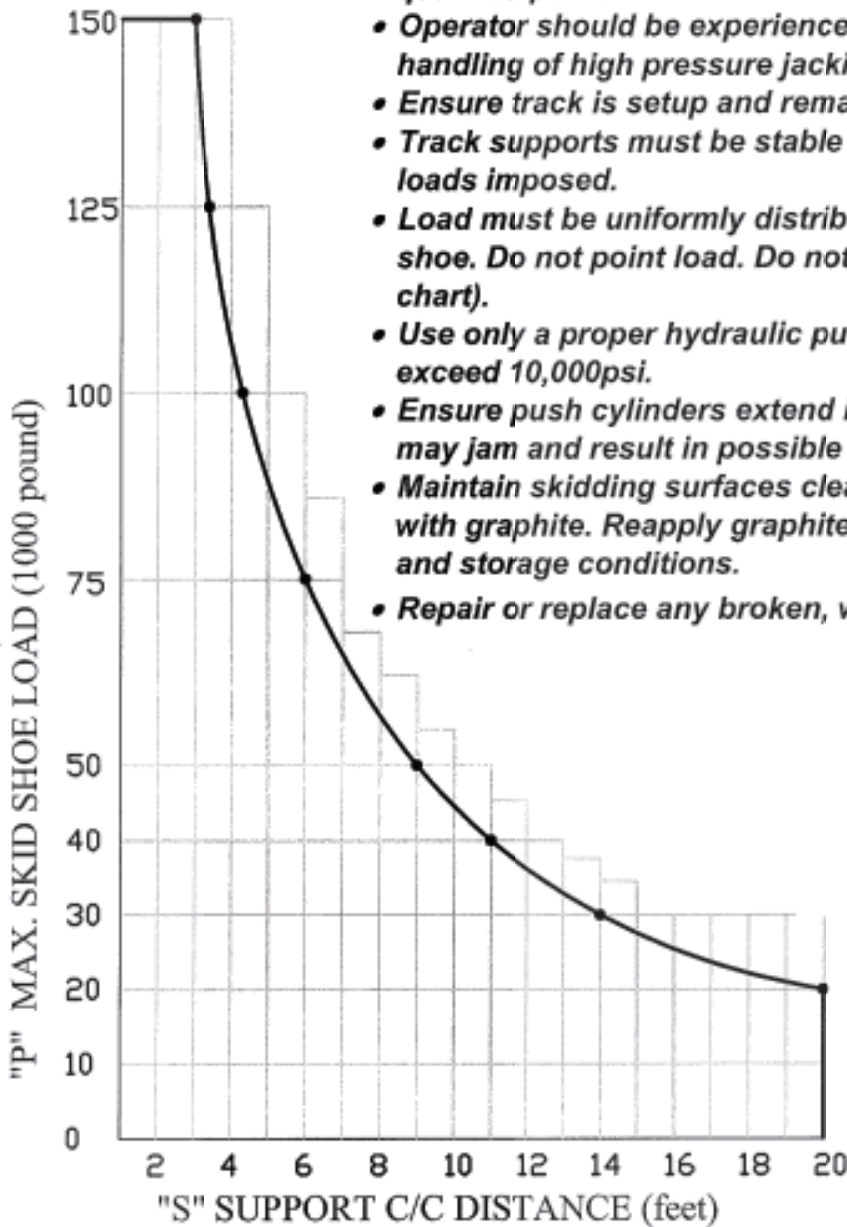

300 TON HYDRA SLIDE

Location				37 ALLEN STREET WEST WATERLOO, ONTARIO CANADA N2L 1C9 tel (519) 746-6388 fax (519) 746-3529	SK. No.	
Owner/Client					1	
Project CAPACITY CHART	Drawn by	HH	Checked by	RM	Project No.	M1-525
	Designed by	HH	Date	NOV. 2006	Scale	1/8"=1'-0
					Sheet	